

DEWALT



HAMMER REFERENCE GUIDE

1" SDS+ CORDED PISTOL GRIP

Manufacturer	DeWALT	Hilti	Bosch	Bosch	Makita	Makita	Makita
Catalog #	D25133K	TE 2-S	11253VSR	11250VSRD	HR1830F	HR2611F	HR2651
Impact Energy (Joules)**	2.6	1.8	3.0	2.2	1.2	2.9	2.9
RPM	1,500	1,200	1,300	1,100	1,500	1,200	1,200
BPM	5,500	4,600	5,800	4,400	5,000	4,600	4,600
Optimal Drilling Range	5/32" – 5/8"	3/16" – 1/2"	5/32" – 1/2"	Up to 1/2"	5/32" – 3/8"	5/32" – 1/2"	5/32" – 1/2"
Rotation Control	Integral Clutch	Integral Clutch	Integral Clutch	Integral Clutch	Integral Clutch	Integral Clutch	Integral Clutch
Battery Voltage/Amps	7 Amps	N/A	7.2 Amps	6.1 Amps	4.2 Amps	7 Amps	7 Amps
Weight (lbs.)	5.7	6.0	8.0	7.4	4.2	6.6	6.6
Vibration m/s ²	15.4	11	N/A	N/A	14	11.5	11.5
Chipping	✓	NO	✓	NO	NO	NO	NO
Service Contract	1 Year Free Service	2 Year Free Service	1 Year Limited				



SDS+ CORDLESS D-HANDLE

Manufacturer	DeWALT	Milwaukee	Makita	Bosch
Catalog #	DCH133M2	2713-22	XRH04T	XRH03T
Impact Energy (Joules)**	2.6	2.8	2.0	2.0
RPM	1,500	1,500	1,100	1,100
BPM	5,500	4,400	4,000	4,000
Optimal Drilling Range	5/32" – 5/8"	5/32" – 1/2"	5/32" – 1/2"	5/32" – 1/2"
Rotation Control	Integral Clutch	Integral Clutch	Integral Clutch	Integral Clutch
Battery Voltage/Amps	20V MAX*	18V	18V	18V
Battery Ah	4.0 Ah	5.0 Ah	5.0 Ah	5.0 Ah
Weight (lbs.)	5.5	7.7	7.0	7.7
Vibration Control	NO	NO	NO	NO
Vibration m/s ²	N/A	N/A	N/A	N/A
Chipping	✓	✓	✓	✓
Service Contract	1 Year Free Service	5 Year Limited	1 Year Limited	1 Year Limited



1" SDS+ CORDLESS L-SHAPE

Manufacturer	DeWALT	Hilti	Milwaukee	Bosch	Makita
Catalog #	DCH273P2	TE 4-A22	2712-22	GBH18V-26K	XRH01T
Impact Energy (Joules)**	2.1	2.0	2.3	2.6	2.3
RPM	1,100	1,050	1,400	890	950
BPM	4,600	5,200	4,900	4,350	4,700
Optimal Drilling Range	5/32" – 1/2"	3/16" – 1/2"	5/32" – 1/2"	5/32" – 1/2"	3/16" – 1/2"
Rotation Control	Integral Clutch	Integral Clutch	Integral Clutch	Kickback Control	Integral Clutch
Battery Voltage/Amps	20V MAX*	22V	18V	18V	18V
Battery Ah	5.0 Ah	5.2 Ah	5.0 Ah	6.0 Ah	5.0 Ah
Weight (lbs.)	6.8	7.3	7.0	7.7	7.2
Vibration Control	✓	NO	✓	✓	NO
Vibration m/s ²	6.6	11	8.9	N/A	13.5
Chipping	✓	NO	✓	✓	✓
Cordless Dust Extractor	✓	✓	✓	✓	✓
Service Contract	2 Year Free Service	2 Year Free Service	5 Year Limited	1 Year Limited	1 Year Limited

1" SDS+ CORDLESS L-SHAPE DUST EXTRACTORS

DWH303DH

- Fits DCH273
- Table 1-compliant dust management solution for 1" SDS Plus rotary hammers.
- Drill up to 5/8" diameter, 4" useable length, 6" overall length bits.
- Accepts stop bits with the inclusion of the DWH003SBH.

1" & 1-1/8" SDS+ CORDED D-HANDLE

Manufacturer	DeWALT	Milwaukee	Bosch	Makita	DeWALT	Bosch
Catalog #	D25262K	5262-21	11255VSR	HR2641	D25263K	RH228VC
Impact Energy (Joules)**	2.8	2.8	2.7	2.9	3.0	3.3
RPM	1,500	1,500	1,300	1,100	1,450	1,300
BPM	5,540	5,625	5,800	4,500	5,350	5,100
Optimal Drilling Range	5/32" – 5/8"	5/32" – 1/2"	3/16" – 5/8"	1/4" – 5/8"	1/4" – 3/4"	1/4" – 3/4"
Rotation Control	Integral Clutch	Integral Clutch	Integral Clutch	Integral Clutch	Integral Clutch	Integral Clutch
Battery Voltage/Amps	8 Amps	8 Amps	7.5 Amps	8 Amps	8.5 Amps	8 Amps
Weight (lbs.)	6.6	6.1	6.7	7.1	6.8	6.9
Vibration Control	✓	NO	NO	AVT	✓	✓
Vibration m/s ²	9.6	N/A	N/A	11.5	9.8	N/A
Chipping	✓	✓	✓	✓	✓	✓
Service Contract	2 Year Free Service	5 Year Limited	1 Year Limited	1 Year Limited	2 Year Free Service	1 Year Limited



1-1/8" SDS+ CORDLESS L-SHAPE

Manufacturer	DeWALT	Milwaukee	Hilti	DeWALT	Hilti	Bosch	Makita
Catalog #	DCH293R2	2715-22	TE 6-A22/A36	DCH293X2	TE30-A36	RH328VC-36K	XRH05Z
Impact Energy (Joules)**	3.5	4.4	2.4	3.5	3.7	3.3	3.0
RPM	1,000	1,350	1,050	1,000	850	940	1,250
BPM	4,480	5,000	5,100	4,480	4,500	4,100	5,000
Optimal Drilling Range	5/8" – 7/8"	5/8" – 7/8"	1/4" – 5/8"	5/8" – 7/8"	3/16" – 1-1/8"	5/8" – 7/8"	1/4" – 5/8"
Rotation Control	E-Clutch	NO	Integral Clutch	E-Clutch	ATC	Kickback Control	Integral Clutch
Battery Voltage/Amps	20V MAX*	18V	22V/36V	20V MAX*	36V	36V	36V
Battery Ah	6.0 Ah	5.0 Ah	2.6 Ah	9.0 Ah	6.0 Ah	4.0 Ah	N/A
Weight (lbs.)	8.2	7.7	8.2	8.2	12.1	9.6	9.3
Vibration Control	✓	✓	✓	✓	✓	✓	NO
Vibration m/s ²	8.5	8.6	9.0	8.5	11	14.5	14.5
Chipping	✓	✓	✓	✓	✓	✓	✓
Cordless Dust Extractor	✓	✓	✓	✓	NO	NO	NO
Service Contract	2 Year Free Service	5 Year Limited	2 Year Free Service	2 Year Free Service	2 Year Free Service	1 Year Limited	1 Year Limited



COMPACT 1-1/8" SDS+ CORDED L-SHAPE

Manufacturer	DeWALT	Hilti	Hilti	Milwaukee	Bosch	Makita
Catalog #	D25333K	TE 7	TE 7-C	5268-21	RH328VCQ	HR2811F
Impact Energy (Joules)**	3.5	1.8	2.6	4.9	3.2	2.8
RPM	1,150	1,050	740	1,500	900	1,100
BPM	5,200	4,980	4,020	5,500	4,000	4,500
Optimal Drilling Range	3/16" – 7/8"	3/16" – 1/2"	1/4" – 5/8"	5/8" – 7/8"	5/8" – 7/8"	1/4" – 5/8"
Rotation Control	Integral Clutch	Integral Clutch	Integral Clutch	Integral Clutch	Integral Clutch	Integral Clutch
Battery Voltage/Amps	8.5 Amps	N/A	N/A	8 Amps	8 Amps	6.7 Amps
Weight (lbs.)	8.2	6.4	7.5	7.5	7.9	7.7
Vibration Control	✓	NO	NO	✓	✓	✓
Vibration m/s ²	10	14	14	10.6	N/A	15
Chipping	✓	NO	✓	✓	✓	✓
Service Contract	2 Year Free Service	2 Year Free Service	2 Year Free Service	5 Year Limited	1 Year Limited	1 Year Limited

1-1/8" SDS+ CORDLESS DUST EXTRACTORS

DWH304DH

- Fits DCH293, D25333
- Table 1-compliant dust management solution for 1-1/8" SDS Plus rotary hammers.
- Drill up to 1" Diameter, 8" useable length, 10" overall length bits.
- Clear, durable dust box ensures users can see when dust box needs to be emptied.

PREMIUM 1-1/8" SDS+ CORDED L-SHAPE

Manufacturer	DeWALT	Hilti	Hilti	Bosch	Makita
Catalog #	D25416K	TE 30-C-AVR	TE 40-AVR	RH32VCQ	HR3210C
Impact Energy (Joules)**	4.2	3.2	4.9	4.2	5.5
RPM	820	750	550	760	630
BPM	4,700	4,080	3,180	3,600	3,300
Optimal Drilling Range	5/8" – 7/8"	3/8" – 13/16"	9/16" – 15/16"	1/2" – 7/8"	1/2" – 7/8"
Rotation Control	E-Clutch	Integral Clutch	Integral Clutch	Integral Clutch	Integral Clutch
Battery Voltage/Amps	9 Amps	N/A	N/A	8.5 Amps	8.2 Amps
Weight (lbs.)	9.2	9.3	12.3	10.3	11.4
Vibration Control	✓	✓	✓	✓	✓
Vibration m/s ²	8.2	12	10.7	N/A	10
Chipping	✓	✓	✓	✓	✓
Service Contract	2 Year Free Service	2 Year Free Service	2 Year Free Service	1 Year Limited	1 Year Limited



1-9/16" SDS MAX CORDLESS/CORDED

Manufacturer	DeWALT	Milwaukee	DeWALT	Hilti	Bosch	Makita	Milwaukee
Catalog #	DCH481X2	2717-21HD	D25481K	TE 50-AVR	RH540M	HR4002	5317-21
Impact Energy (Joules)**	6.1	6.9	6.1	5.9	8.3	6.2	7.4
RPM	540	450	540	360	340	680	450
BPM	3,150	3,000	3,150	3,510	2,900	2,500	3,000
Optimal Drilling Range	1/2" – 1-1/8"	1/2" – 1-1/8"	1/2" – 1-1/8"	5/8" – 1-1/4"	1/2" – 1-1/8"	1/2" – 1"	1/2" – 1-1/8"
Rotation Control	E-Clutch	NO	Integral Clutch	Integral Clutch	Integral Clutch	Integral Clutch	Integral Clutch
Battery Voltage/Amps	60V MAX*	18V	10.5 Amps	N/A	12 Amps	10 Amps	10.5 Amps
Battery Ah	9.0 Ah	9.0 Ah	N/A	N/A	N/A	N/A	N/A
Weight (lbs.)	13	13	13	13.4	15.2	14.6	15
Vibration Control	✓	NO	✓	✓	NO	NO	NO
Vibration m/s ²	9.4	N/A	9.4	11.4	N/A	17.5	N/A
Chipping	✓	✓	✓	✓	✓	✓	✓
Service Contract	2 Year Free Service	5 Year Limited	2 Year Free Service	2 Year Free Service	1 Year Limited	1 Year Limited	5 Year Limited



LARGE HAMMER DUST EXTRACTION DWH050

- Works with all SDS+, SDS MAX, and Spine Rotary Hammers.
- Part of a Table 1-Compliant system for SDS+ and SDS MAX hammers.
- Two Interchangeable drilling heads for optimum dust removal. One for holes up to 1-1/2" and one for holes up to 2".
- AirLock compatible connector which allows for quick connection to hose & swivel capability.

1-3/4" SDS MAX CORDED

Manufacturer	DeWALT	Hilti	Hilti	Bosch	Makita	Milwaukee
Catalog #	D25604K	TE 60-AVR	TE 60-AVR/ATC	RH745	HR4510C	5426-21
Impact Energy (Joules)**	8	11.9	7.9	10.3	12.4	11.9
RPM	210–415	350–450	350	150–305	130–280	350–450
BPM	1,430–2,840	2,200–2,840	3,300	1,380–2,750	1,250–2,750	2,200–2,840
Optimal Drilling Range	5/8" – 1-1/4"	3/4" – 1-3/8"	11/16" – 1-9/16"	5/8" – 1-9/16"	3/4" – 1-3/8"	3/4" – 1-3/8"
Rotation Control	E-Clutch	Integral Clutch	ATC	Integral Clutch	Integral Clutch	Integral Clutch
Battery Voltage/Amps	13.5 Amps	14 Amps	N/A	13.5 Amps	13.5 Amps	14 Amps
Weight (lbs.)	15.1	15	17.2	18.5	19.6	16.2
Vibration Control	✓	✓	✓	NO	✓	✓
Vibration m/s ²	9.1	7.5	7.5	N/A	9.5	N/A
Chipping	✓	✓	✓	✓	✓	✓
Service Contract	2 Year Free Service	2 Year Free Service	2 Year Free Service	1 Year Limited	1 Year Limited	5 Year Limited

1-7/8" SDS MAX COMBI-HAMMERS

Manufacturer	DeWALT	DeWALT	Bosch	Hilti	Hilti	Makita
Catalog #	DCH733X2	D25733K	RH850VC	TE 70-ATC-AVR	TE 70-AVR	HR4013C
Impact Energy (Joules)**	13.3	13.3	12.6	11.5	11.5	11.4
RPM	177-355	177-355	150-305	360	360	500
BPM	2,705	2,705	1,380–2,750	2,760	2,760	2,900
Optimal Drilling Range	7/8" – 1-3/4"	7/8" – 1-3/4"	7/8" – 1-3/4"	7/8" – 1-3/4"	7/8" – 1-3/4"	5/8" – 1-1/4"
Rotation Control	E-Clutch	E-Clutch	Integral Clutch	ATC	Integral Clutch	Integral Clutch
Battery Voltage/Amps	60V MAX*	15 Amps	13.5 Amps	N/A	N/A	11 Amps
Battery Ah	3.0 Ah	N/A	N/A	N/A	N/A	N/A
Variable Speed Dial	✓	✓	✓	N/A	N/A	✓
Variable Speed Dial Positions	7	7	7	1	1	???
Weight (lbs.)	20	20.3	19.7	20.9	18.3	15.6
Vibration Control	✓	✓	✓	✓	✓	✓
Vibration m/s ²	9.8	9.8	N/A	10	10	5
Chipping	✓	✓	✓	✓	✓	✓
Service Contract	2 Year Free Service	2 Year Free Service	1 Year Limited	2 Year Free Service	2 Year Free Service	1 Year Limited

2" SDS MAX CORDED

Manufacturer	DeWALT	Bosch	Bosch	Makita	Hilti	Milwaukee
Catalog #	D25773K	RH1255VC	11245EVS	HR5212C	TE 80-ATC-AVR	5342-21
Impact Energy (Joules)**	19.4	19.1	14.2	19	11.5	27
RPM	145–290	100–200	120–250	1230–260	360	125–250
BPM	1,105–2,210	1,000–2,150	1,100–2,500	1,100–2,250	2,760	975–1,950
Optimal Drilling Range	1" – 1-7/8"	1" – 1-7/8"	3/4" – 1-3/4"	3/4" – 1-9/16"	3/4" – 1-9/16"	1" – 1-7/8"
Rotation Control	E-Clutch	Integral Clutch	Integral Clutch	Integral Clutch	ATC	Integral Clutch
Battery Voltage/Amps	15 Amps	15 Amps	14 Amps	15 Amps	N/A	15 Amps
Weight (lbs.)	23.2	26.2	24.5	26.2	21.4	27.8
Vibration Control	✓	✓	NO	✓	✓	✓
Vibration m/s ²	10.2	N/A	24	9	7.5	N/A
Chipping	✓	✓	✓	✓	✓	✓
Service Contract	2 Year Free Service	1 Year Limited	1 Year Limited	1 Year Limited	2 Year Free Service	1 Year Limited



12 LB SDS MAX CORDED DEMOLITION

Manufacturer	DeWALT	Bosch	Makita	Hilti
Catalog #	D25810K	DH507	HM0870C	TE 500-AVR
Impact Energy (Joules)**	7.1	7.6	11.4	8.1
RPM	N/A	N/A	N/A	N/A
BPM	3,150	1,350–2,800	1,100–2,650	3,180
Optimal Chipping Range	≤ 4"	N/A	N/A	N/A
Rotation Control	NO	NO	NO	NO
Battery Voltage/Amps	10.5 Amps	10 Amps	10 Amps	N/A
Weight (lbs.)	12	12.4	11	12.6
Vibration Control	✓	NO	NO	✓
Vibration m/s ²	9.4	N/A	11	10.1
Chipping	✓	✓	✓	✓
Cordless Dust Extractor	NO	NO	NO	NO
Service Contract	2 Year Free Service	1 Year Limited	1 Year Limited	2 Year Free Service



14 LB SDS MAX CORDED DEMOLITION

Manufacturer	DeWALT	Bosch
Catalog #	D25831K	11321EVS
Impact Energy (Joules)**	8	8.3
BPM	1,430 – 2,840	1,300 – 2,900
Optimal Chipping Range		N/A
Battery Voltage/Amps	13.5 Amps	13 Amps
Weight (lbs.)	13.6	13.7
Vibration Control	✓	✓
Vibration m/s ²	8.3	N/A
Chipping	✓	✓
Service Contract	2 Year Free Service	1 Year Limited



19 LB SDS MAX CORDED DEMOLITION

Manufacturer	DeWALT	Bosch	Makita	Hilti	Milwaukee
Catalog #	D25872K	DH712VC	HM1111C	TE 700-AVR	5446-21
Impact Energy (Joules)**	13.3	13	17.2	10.8	11.9
BPM	1,350 – 2,705	1,380 – 2,760	1,100 – 2,650	2,760	2,200 – 2,840
Optimal Chipping Range	≤ 5"	N/A	N/A	N/A	N/A
Battery Voltage/Amps	15 Amps	14.5 Amps	14 Amps	N/A	14 Amps
Weight (lbs.)	19	18.3	17	17.4	16
Vibration Control	✓	✓	✓	✓	✓
Vibration m/s ²	9.7	N/A	8	6.5	N/A
Chipping	✓	✓	✓	✓	✓
Service Contract	2 Year Free Service	1 Year Limited	1 Year Limited	2 Year Free Service	5 Year Limited


LARGE HAMMER DUST EXTRACTION CHISELING

DWH053

- Works with all SDS MAX Rotary and Demolition Hammers.
- Part of a Table 1-Compliant system for SDS MAX hammers.
- 3 different dust boots allows the user to match the boot length to the chisel to provide maximum dust extraction.
- Can be used with bull point, cold chisels, scaling chisels and bushing tools.
- AirLock compatible connector which allows for quick connection to hose & swivel capability.

23 LB SDS MAX CORDED DEMOLITION

Manufacturer	DeWALT	Bosch	Makita	Hilti
Catalog #	D25892K	11316EVS	HM1203C	TE 800-AVR
Impact Energy (Joules)**	19.4	16.8	25.5	20.3
BPM	1,105 – 2,210	900 – 1,890	950 – 1,900	1,890
Optimal Chipping Range	≤ 5"	N/A	N/A	N/A
Battery Voltage/Amps	15 Amps	14 Amps	14 Amps	N/A
Weight (lbs.)	23	22.5	20.3	23.4
Vibration Control	✓	NO	NO	✓
Vibration m/s ²	10	N/A	15.5	8
Chipping	✓	✓	✓	✓
Service Contract	2 Year Free Service	1 Year Limited	1 Year Limited	2 Year Free Service

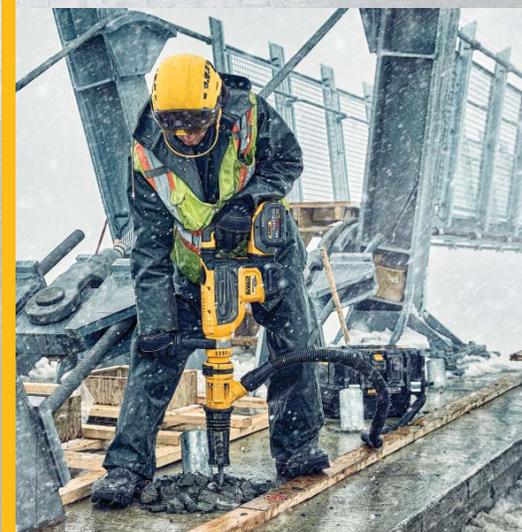

23 LB SDS MAX INLINE DEMOLITION

Manufacturer	DeWALT	DeWALT	Hilti	Bosch	Makita
Catalog #	D25899K	D25901K	TE 1000-AVR	DH1020VC	HM1214C
Tool Holder	SDS MAX	SDS MAX	22MM HEX	SDS MAX	SDS MAX
Impact Energy (Joules)*	17.9	19	25.8	23	25.7
BPM	2,040	1,020 – 2,040	1,950	850 – 1,700	950 – 1,900
Optimal Chipping Range	≤ 5"	N/A	N/A	N/A	N/A
Battery Voltage/Amps	14 Amps	14 Amps	N/A	15 Amps	14 Amps
Weight (lbs.)	21	23.4	27.6	25.1	27.1
Vibration Control	NO	✓	✓	✓	✓
Vibration m/s ²	11.5	8	5	N/A	8
Chipping	✓	✓	✓	✓	✓
Dust Collection	DWH053	DWH053	TE-DRS-B	HDC300	196858-4
Service Contract	1 Year Free Service	2 Year Free Service	2 Year Free Service	1 Year Limited	1 Year Limited



29 LB SDS MAX INLINE DEMOLITION

Manufacturer	DeWALT	Bosch	Makita	Hilti	Hilti
Catalog #	D25951K	DH1020VC	HM1214C	TE 1000-AVR	TE 1500-AVR
Tool Holder	SDS MAX	SDS MAX	SDS MAX	22MM HEX	22MM HEX
Impact Energy (Joules)*	24	23	25.7	25.8	29.8
BPM	1,620	850 – 1,700	950 – 1,900	1,950	1,620
Optimal Chipping Range	≤ 6"	N/A	N/A	N/A	N/A
Battery Voltage/Amps	15 Amps	15 Amps	14 Amps	N/A	N/A
Weight (lbs.)	29.3	25.1	27.1	27.6	31.3
Vibration Control	✓	✓	✓	✓	✓
Vibration m/s ²	9	N/A	8	5	12
Chipping	✓	✓	✓	✓	✓
Dust Collection	DWH053	HDC300	196858-4	TE-DRS-B	TE-DRS-B
Service Contract	2 Year Free Service	1 Year Limited	1 Year Limited	2 Year Free Service	2 Year Free Service

LARGE HAMMER DUST EXTRACTION DEMOLITION

DWH052K

- Compatible with DEWALT D25960 Demolition Hammer, DEWALT D25980 Pavement Breaker, plus most 1-1/8" Electric Pavement Breakers.
- Part of a Table 1-Compliant system for 1-1/8" Hex demolition hammers.
- AirLock compatible connector which allows for quick connection to hose & swivel capability.

40 LB 1-1/8" HEX DEMOLITION HAMMER

Manufacturer	DeWALT	Bosch	Makita	Makita
Catalog #	D25960K	11335K	HM1307CB	HM1317CB
Impact Energy (Joules)*	35	46	35	35
BPM	1,460	1,300	730 – 1,450	730 – 1,450
Optimal Chipping Range	≤ 8"	N/A	N/A	N/A
Battery Voltage/Amps	15 Amps	15 Amps	14 Amps	14 Amps
Weight (lbs.)	40.5	38	38	42
Vibration Control	✓	✓	NO	✓
Vibration m/s ²	6.8	N/A	12	7
Chipping	✓	✓	✓	✓
Service Contract	2 Year Free Service	1 Year Limited	1 Year Limited	1 Year Limited

60 LB 1-1/8" HEX PAVEMENT BREAKER

Manufacturer	DeWALT	Bosch	Bosch	Makita	Makita	Hilti
Catalog #	D25980K	BH2760VC	BH2770VCD	HM1810X3	HM1812X3	TE 3000-AVR
Impact Energy (Joules)*	62	47.5	58	63	72	68
BPM	960	1,000	1,000	1,100	870	860
Optimal Chipping Range	≤ 12"	N/A	N/A	N/A	N/A	N/A
Battery Voltage/Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps	15 Amps
Weight (lbs.)	68.3	63	63.2	71.3	69.1	65.9
Vibration Control	✓	✓	✓	✓	✓	✓
Vibration m/s ²	4.8	N/A	N/A	9	6.5	7
Chipping	✓	✓	✓	✓	✓	✓
Service Contract	2 Year Free Service	1 Year Limited	1 Year Limited	1 Year Limited	1 Year Limited	2 Year Free Service



HOLE SIZES

		HAMMER SKU											
		DCH273	D25133K	DCH133	D25262K	D25263K	DCH293	D25333K	D25416K	D25481K DCH481	D25604K	D25733K DCH733	D25773K
5/32"	✓	✓	✓	✓	✓	✓	✓	×	×	×	×	×	×
3/16"	✓	✓	✓	✓	✓	✓	✓	×	×	×	×	×	×
7/32"	✓	✓	✓	✓	✓	✓	✓	✓	✓	×	×	×	×
1/4"	✓	✓	✓	✓	✓	✓	✓	✓	✓	×	×	×	×
3/8"	✓	✓	✓	✓	✓	✓	✓	✓	✓	×	×	×	×
1/2"	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	×	×	×
5/8"	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	×	×
3/4"	×	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	×
7/8"	×	×	×	×	✓	✓	✓	✓	✓	✓	✓	✓	✓
1"	×	×	×	×	✓	✓	✓	✓	✓	✓	✓	✓	✓
1-1/8"	×	×	×	×	×	×	×	×	✓	✓	✓	✓	✓
1-1/4"	×	×	×	×	×	×	×	×	×	✓	✓	✓	✓
1-3/8"	×	×	×	×	×	×	×	×	×	✓	✓	✓	✓
1-1/2"	×	×	×	×	×	×	×	×	×	✓	✓	✓	✓
1-5/8"	×	×	×	×	×	×	×	×	×	✓	✓	✓	✓
1-3/4"	×	×	×	×	×	×	×	×	×	×	✓	✓	✓
1-7/8"	×	×	×	×	×	×	×	×	×	×	✓	✓	✓
2"	×	×	×	×	×	×	×	×	×	×	✓	✓	✓
CORE DRILLING													
<2 - 1/2"	×	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
2-1/2" - 3-1/2"	×	×	×	×	✓	✓	✓	✓	✓	✓	✓	✓	✓
3-1/2" - 4"	×	×	×	×	×	×	×	×	×	✓	✓	✓	✓
4" - 5"	×	×	×	×	×	×	×	×	×	✓	✓	✓	✓
5" - 6"	×	×	×	×	×	×	×	×	×	×	×	✓	✓

Optimum
 Maximum
 Not Recommended

YOUR FIRST LINE OF DEFENSE.™

DEWALT'S PERFORM & PROTECT™ line of tools is designed to provide a high level of one or more of the following: control, dust containment or low vibration, without sacrificing performance.



- Dust shrouds and dust extractors can decrease the potential of inhaling dust. They can also help increase visibility and reduce cleanup and maintenance costs.
- DEWALT dust systems are compliant through their adherence to OSHA requirements for handheld and stand-mounted drills (including impact and rotary hammer drills).



- The DEWALT anti-rotation E-Clutch® system offers technology capable of detecting the motion of the tool, shutting it down if necessary. The red indicator LED illuminates when the E-Clutch® system is engaged.
- Power Loss Reset™ feature prevents accidental re-starts of the tool after a user experiences a power outage such as a tripped breaker or accidental unplugging of the cord when the switch is in the locked-on position.



- SHOCKS-Active Vibration Control® System reduces vibration at the handles compared to hammers without such systems.

