

DEWALT[®]

TSTAK[®]

STORAGE SOLUTIONS



GUARANTEED TOUGH[®]

CUSTOMIZATION IN VARIOUS CONFIGURATIONS - STACKING UP TO 3 - MAX 66 LBS (30 KG)



ORGANIZATION



REMOVABLE CUPS




BALL BEARING SLIDES



EASE OF USE



LOCKABLE

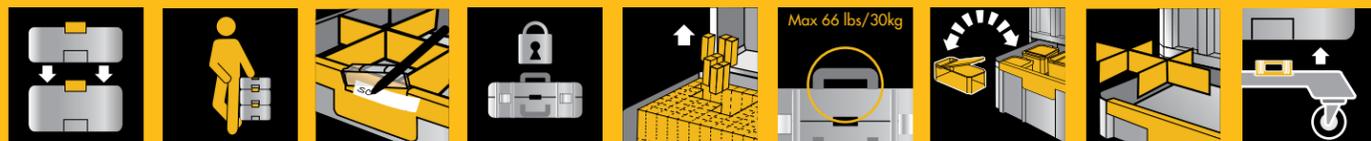

TSTAK® III DWST17803



Single Deep Drawer Unit
16.75" x 12.25" x 6.875" (42.8 x 31.4 x 17.6 cm)
2.5 gallons (9.5 liters)
Load Capacity - 16.5 lbs (7.5 kg)

TSTAK® IV DWST17804



Double Shallow Drawer Unit
16.25" x 12.25" x 6.375" (42.8 x 31.1 x 17.6 cm)
2.1 gallons (8 liters)
Load Capacity - 16.5 lbs (7.5 kg)

TSTAK® V DWST17805



Clear Lid Organizer
17.25" x 5.68" x 13" (44 x 14.4 x 33.2 cm)
1.6 gallons (6.3 liters)
Load Capacity - 44 lbs (20 kg)

TSTAK® VI DWST17806



Deep Box
17.25" x 11.88" x 13" (44 x 30.15 x 33.2 cm)
6 gallons (23 liters)
Load Capacity - 66 lbs (30 kg)

TSTAK® II DWST17807



Flat Top Box
17.25" x 13" x 6.375" (44 x 34.17 x 16.3 cm)
3.5 gallons (13.5 liters)
Load Capacity - 66 lbs (30 kg)

TSTAK® I DWST17808




Long Handle Box
17.25" x 13" x 7.25" (44 x 33.17 x 18.52 cm)
3.7 gallons (14 liters)
Load Capacity - 66 lbs (30 kg)

TSTAK® CART DWST17889



19.12" x 7.12" x 17.12" (48.6 x 18.1 x 43.6 cm)
Load Capacity - 210 lbs (100 kg)

TSTAK® FOAM DWST88801



Removable blocks allow for customization for different tool shapes. Works with: DWST17808, DWST17807, DWST17805 and DWST17806

TSTAK® TROLLEY DWST17888

17.25" x 13" x 6.375" (49.5 x 68 x 30 cm)
When Open 17.25" x 22" x 41" (49.5 x 56 x 104.7 cm)
Load Capacity on Flat Surfaces - 220 lbs (100 kg)
Load Capacity on Stairs 110 lbs (50 kg)



DEWALT®

TSTAK®

STORAGE SOLUTIONS

TESTED FOR TOUGHNESS

We test the DEWALT® **TSTAK**® storage family under real life conditions.

Raw materials for the DEWALT® **TSTAK**® are tested to meet quality and product specifications.

All testing is performed according to international standards.

An uncompromising quality process ensures that the final product gives excellent performance.

TEST	PERFORMANCE
CARRY UP TO 3 UNITS	MAX 66 lbs (30 kg)
DROP TEST	MAX 6 Flat Drops With Declared Load Capacity
METAL RESISTANCE TO CORROSION	24 Hours to a 5% Salt Solution
HANDLE STRENGTH	1 Hour with 150% Declared Load Capacity
HINGE DURABILITY	1,000 Lid Opening and Closings