

DEWALT

20V^{MAX}
LITHIUM ION **XR**
BRUSHLESS



ERGONOMIC GRIP

Rubber Overmold for better control

VSR TRIGGER

Variable speed trigger for user control

BRUSHLESS MOTOR

ELECTRONIC BRAKE

Stops the blade after the trigger is released

BEVEL CAPACITY

57° beveling capacity with stops at 45° and 22.5°

INCLUDES



(1) DCB205



(1) DCB115

7 1/4" XR BLADE

Maximized for run-time efficiency; full-size blade for corded capacity

ON BOARD LED

Adjustable LED for low-light situations

LOWER GUARD

Design improves performance when making bevel cuts and cutting shim


*Maximum initial battery voltage (measured without a workload) is 20 volts. Nominal voltage is 18.
†Works with existing Greenlee and Ripley bushings

THE ADVANTAGE

UP TO **330 CROSS CUTS ON A SINGLE CHARGE**

**20V MAX* XR® BRUSHLESS
7-1/4" CIRCULAR SAW KIT**

DCS570P1

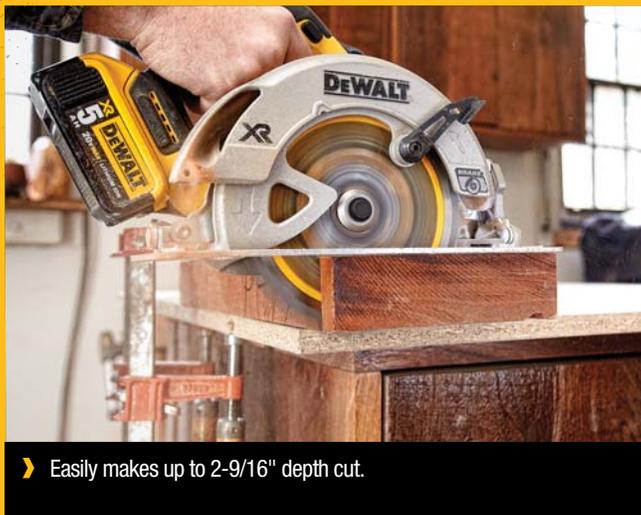

➤ Easily makes up to 2-9/16" depth cut.

SPECIFICATIONS	
Bevel Capacity	57°
Bevel Stops	22.5 & 45
Blade Diameter	7-1/4"
Depth of Cut At 45°	2"
Depth of Cut At 90°	2-9/16"
Max Watts Out	900 W
Motor	Brushless
RPM	5500 RPM
Tool Weight	7.5 LBS

TOOL WARRANTY

3 YEAR LIMITED WARRANTY	1 YEAR FREE SERVICE	90 DAY MONEY BACK GUARANTEE
--------------------------------------	----------------------------------	--

BATTERY WARRANTY

3 YEAR LIMITED WARRANTY	2 YEAR FREE SERVICE
--------------------------------------	----------------------------------

20V^{MAX}
LITHIUM ION

100+

PRODUCTS

OUR FASTEST GROWING SYSTEM

RELATED TOOLS



DW3278
CIRCULAR SAW
RIP FENCE



DCS575
FLEXVOLT® 60V MAX*
7-1/4" CIRCULAR SAW



DCS577
FLEXVOLT® 60V MAX*
7-1/4" FRAMING SAW



DCS367
20V MAX* XR® BRUSHLESS
COMPACT RECIPROCATING SAW



DW3199
7-1/4" 24T PRECISION
FRAMING SAW BLADE

Dealer Stamp

1-800-4-DEWALT
www.DEWALT.com